

Copy!

VOC Emissions From the Drying of Red Alder Lumber

Report to

**Northwest Hardwoods
Centralia, WA**

Report by

**Michael R. Milota
Department of Wood Science and Engineering
Oregon State University
Corvallis, OR 97331**

May 18, 2005

RECEIVED
JUN - 8 2005
SOUTHWEST CLEAN
AIR AGENCY

TABLE OF CONTENTS

	Page
I Results Summary	1
II Lumber Source and Handling	1
III Kiln Description and Operation	1
Humidity control	2
Temperature control	3
Schedules	3
Charge sequence	3
IV Sampling Systems and Methodologies	4
V Data Reduction and Treatment	6
Flow calculations	7
Moisture calculations	7
Total hydrocarbon calculations	7
VI Sampling Results	8
VII Quality Assurance	11
Leak checks	11
Calibration	11
Anomalies	11

APPENDICES

Appendix 1. Detailed sampling procedures	12
Appendix 2. Data in electronic form	21
Appendix 3. Samples of field data sheets	22
Appendix 4. Calibration data	27

LIST OF FIGURES

FIGURE 1. Schematic of kiln and sampling system	2
FIGURE 2. Drying schedule	3
FIGURE 3. Dry- and wet-bulb temperatures during the cycle	4
FIGURE 4A. Schematic of heated filter box.	5
FIGURE 4B. Photo of VOC sampling system	6
FIGURE 5. Hydrocarbon concentration and vent rate versus time	9
FIGURE 6. Cumulative emissions and rate of emissions versus time	9
FIGURE 7. Moisture content versus time for the charge	10
FIGURE 8. Cumulative emissions versus moisture content of the charge	10

LIST OF TABLES

TABLE 1. Summary of results	1
TABLE 2. Summary of sample runs for analysis of total hydrocarbon	11

VOC emissions from the drying of red alder lumber

I. Results Summary

One charge, containing 74.8 board feet of 1" random width red alder lumber, were dried from green in a small kiln at Oregon State University. The kiln dry- and wet-bulb temperatures based on a schedule provided by Northwest Hardwoods. The maximum temperature was 185°F (85°C). The air velocity was 500 feet per minute (2.5 m/s). The kiln was indirectly heated with steam. There was no humidification. Regulating the amount of air entering the kiln controlled venting and the humidity.

A JUM 3-200 total hydrocarbon analyzer was used to measure organic emissions following EPA Method 25A. The results are shown in Table 1.

TABLE 1. Summary of results.

Initial MC	Final MC ^A	Time	VOC ^B
%	%	hr:min	lb/mbf
101.5	7	92:03	0.20

^A actual final MC was 3.5% at 120 hours

^B as carbon

II. Lumber Source and Handling

Enough wood for the two charges of lumber was delivered by Northwest Hardwoods on 5-4-05. The top of the pile was covered at the mill to prevent predying and loss of organic compounds during transit. The wood had the characteristic oxidized red color of alder, but was not moldy or stale. The wood was wrapped in plastic and placed in a freezer on 5-5-05. On 5-7-05, half the wood was randomly selected for the first charge. The charge was dried for five days starting on Saturday, May 7.

III. Kiln Description and Operation

A schematic of the kiln is shown in Figure 1. The kiln box is approximately 4' by 4' by 4'. It is indirectly heated by steam. Four dry-bulb thermocouples and two wet-bulb thermocouples are located on the entering-air side of the load. The dry-bulb thermocouples are spaced in a grid. The two wet-bulb thermocouples are under a single sock at the center of the entering-air side of the load.

Humidity control

A 200 L/min MKS mass flow meter controlled and measured the amount of air entering the kiln. It was factory calibrated and checked using a bubble meter. The amount of air entering the kiln is based on the wet-bulb temperature - if it is above setpoint, the airflow is increased and if it is below setpoint the airflow is decreased. This is analogous to venting for a commercial kiln. A minimum of 6 L/min entered the kiln at all times, more than removed by the analyzer (2.6 L/min). Putting air into the kiln at a rate of 100 L/min causes the pressure in the kiln to be 60 to 130 Pa above ambient, depending on location in the kiln (high-pressure or low-pressure side). Thus, any fugitive leakage should be out of the kiln. Two additional flow meters can be manually set to provide additional airflow. These were not used in this study. The steam spray line is disabled, so no water vapor is added to the kiln atmosphere. The impinger train in Figure 1 was not used in this work.

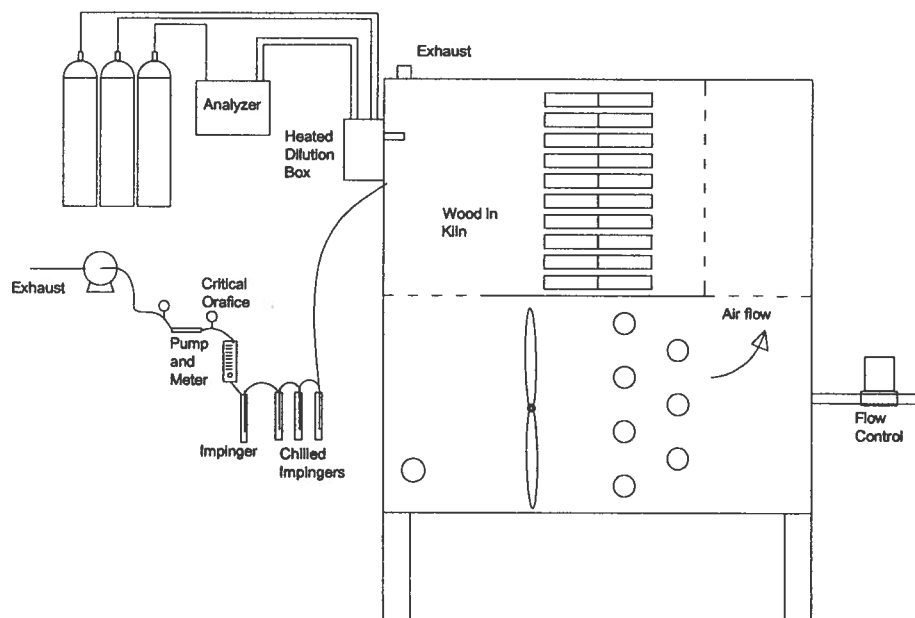


FIGURE 1. Schematic of kiln and sampling system.

Temperature control

Temperature in the kiln is controlled by indirect steam heating. When the average of the four dry-bulb thermocouples is below setpoint, the steam pressure in the coil is increased. When it is above setpoint, steam flow to the coil is reduced.

Schedules

The drying schedule used (Figure 2) was based on drying conditions supplied by the mill. The values in Figure 2 are based on the entering-air temperature. This represents the highest temperature the wood would experience in a commercial kiln.

Charge Sequence

The lumber was unwrapped and 2" were trimmed from each end of each board to give 44" samples. These were then weighed, placed in the kiln and dried according to the schedule in Figure 2. The actual temperatures are shown in Figure 3. Sampling for hydrocarbon was done as described in section IV. At the end of drying the wood was weighed, oven dried, and reweighed so initial and final moisture contents could be determined by ASTM D4442 (oven-dry method).

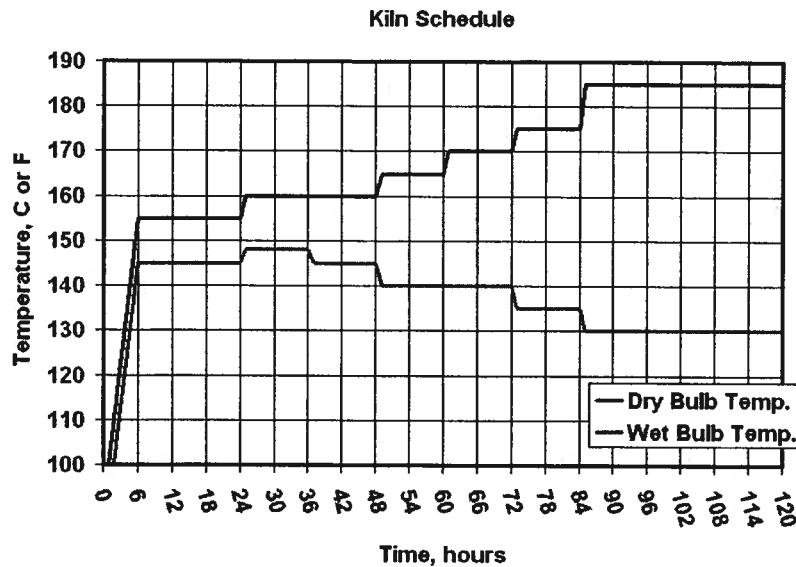


FIGURE 2. Drying schedule.

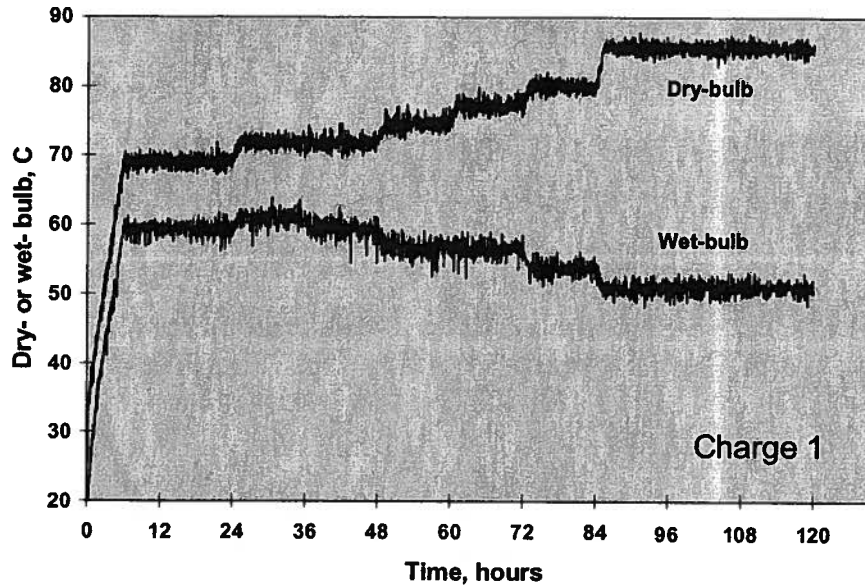


FIGURE 3. Dry- and wet-bulb temperatures.

IV. Sampling Systems and Methodologies

Sampling for total hydrocarbon is done directly from the kiln as shown in Figure 1. The concentration obtained from the hydrocarbon analyzer and the amount of air entering the kiln allow the total hydrocarbon emissions to be calculated. No impingers were used.

Figures 4a and 4b show the hydrocarbon sampling system. Unlike stack testing, all necessary equipment is permanently mounted on the kiln and flows are controlled with valves. The sample is withdrawn from the kiln under the assumption that the gas in the kiln is well-mixed and that the composition in the kiln near the exhaust is the same as the composition of the exhaust. The THC sample was drawn from the kiln directly into a heated dilution/filter box mounted on the side of the kiln. The box was heated to 125°C. Heated dilution gas can be added to the hydrocarbon sample gas to lower the gas moisture content to the detector. Dilution air was used when the gas moisture content in the kiln was greater than 15% so that the air moisture content to the detector remained less than 15%. The sample line from the box to the analyzer was heated to 133°C. The valve at the back of the analyzer was heated to 145°C.

The fuel gas was hydrogen. The span gas was EPA Protocol 905 ppm propane in air, the mid-gas was certified 412 ppm propane. The zero gas was 0.1 ppm air. Detailed sampling procedures are in Appendix 1 and a summary is presented below.

Leak checks were conducted before and after the charge was dried. Valves are closed and all components from just behind the probe tip to the valve at the back of the analyzer are placed under a 18-20 inHg vacuum. Less than one inHg pressure change during two minutes is acceptable and this was met.

Total flow and sample flow to the analyzer were checked using an NIST-traceable flow meter. Total flow is measured with the dilution gas off. Sample flow is measured with it on. This was done at the beginning and end of each sampling interval. The meter was attached to the system near the probe tip within the heated box. The valves were repositioned so that the sample came from the flow meter rather than the kiln. Readings of flow were made with the dilution gas both off and on. The flow readings were verified by observing the change in the analyzer reading for span gas with the dilution gas off and on. The dilution ratio calculated based on the analyzer readings was within 4% of that determined by the flow meter.

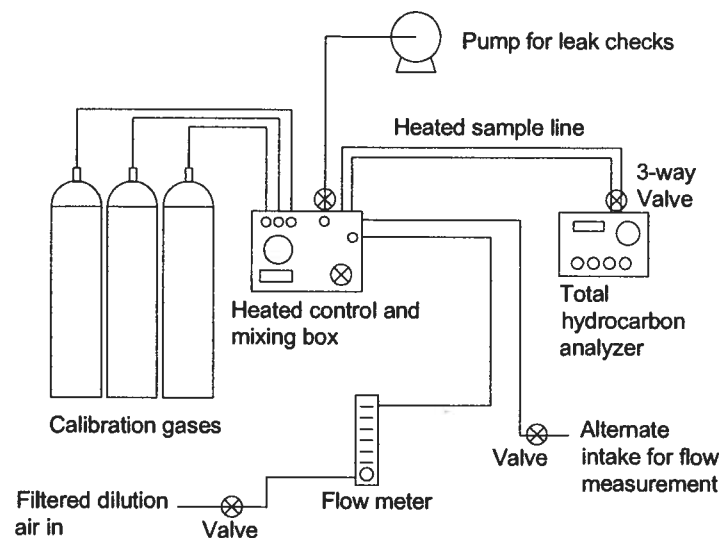


FIGURE 4A. Schematic of heated filter box with air dilution system, heated sample line, and analyzer. Sample enters heated box from back of drawing (box is attached to kiln).

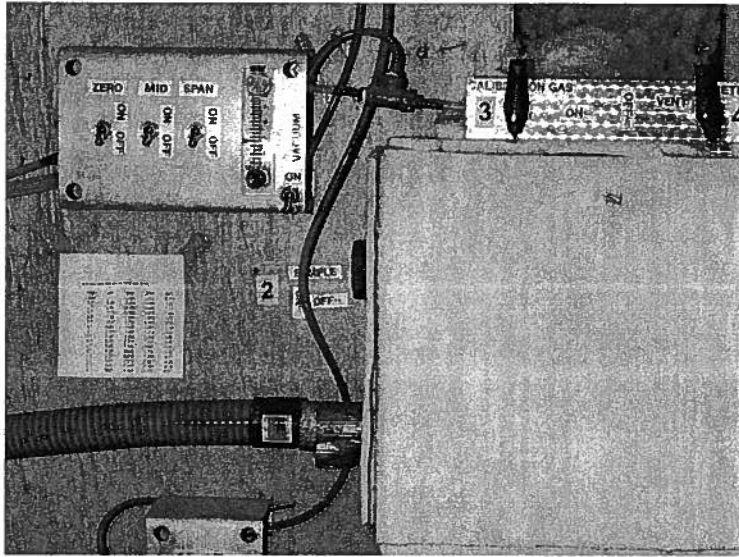


FIGURE 4B. Photo of VOC sampling system showing heated sample box (with white insulation), toggle valves and flow meter for calibration gases (upper left), on/off valve for calibration gas (3 at upper center right), heated sample line to analyzer (green tube, lower left), valve for sample (2 at center), toggle valve to vacuum pump (near calibration gas valves), and vent/flowmeter valve (4 at upper right).

Calibration of the zero and span of the detector was done at the beginning of each run (about every eight to ten hours). The calibration gas was introduced by setting the valves so the calibration gas entered the system near the probe tip at ambient pressure. The calibration was checked at the end of each run with no adjustments made to the zero or span during the run. The span drift was always less than two percent of full scale for a run and generally less than one percent. The zero drift was minimal during entire drying cycles.

V. Data Reduction and Treatment

The "FlowCalc" worksheet in the Excel file "Kiln, Run1.XLS" in Appendix 2 shows the calculations for each 3-minute interval during the charges. Column A is a reading number. Columns B and C are the clock and charge times, respectively. Columns D and E are the average dry- and wet-bulb temperatures. Column F is the vapor pressure of water at the wet-bulb temperature. The absolute humidity is shown in column G and the molal humidity in column H. These are calculated based on the dry-bulb temperature, wet-bulb temperature, vapor pressure.

Flow calculations

The volumetric dry gas flow rate in column I is the flowmeter reading adjusted for the meter calibrations and the molar humidity of the entering gas. This is in standard (at 0°C) liters per minute. In column J this has been converted to a mass flow rate in kg/min and in column K is the same information is expressed as a molal flow rate. These values are for the dry gas vented from the kiln.

Moisture calculations

The water removal rate in g/min (column L) is calculated from the humidity (column G) and the gas flow (column J). The and the total water (column M) is an integration of column L over time.

The moisture content of the wood at each time interval in the event (column N) was determined by reducing the MC of the wood from the previous value by accounting for the amount of water leaving the kiln during the interval. This amount has been adjusted by adjusting the wet-bulb temperature to make the ending moisture content match.

Total hydrocarbon calculations

The original total hydrocarbon analyzer reading is shown in column O. In column P this has been corrected to compensate for the range setting switch on the analyzer and scaling between the analyzer reading and the computer reading. Also in column P, the THA data between sampling runs has been adjusted to the average of the data during the 12-minute period before the analyzer testing and calibration time. The dilution THA (column Q) is the corrected THA reading divided by the dilution ratio (from column Y). In column R we have the opportunity to compensate for the effect of moisture on the JUM detector. This was not done so column R equals column Q. Finally in column S, the hydrocarbon concentration is converted to a dry gas basis concentration using the molar humidity (column H).

In column T, the hydrocarbon flow rate in $g_{\text{carbon}}/\text{min}$ is calculated in a manner analogous to the water flow rate using the dry gas flow rate and the hydrocarbon concentration. Column U is the integral of column T over time, the cumulative hydrocarbon release up to that point in the schedule. Column V is the cumulative unit emissions, that is, column U divided by the oven-dry weight of the wood in the kiln.

Column X indicates the hydrocarbon sampling run and column Y is the dilution ratio during that run. The next two columns, Z and AA, are the cumulative dry gas and water during the kiln cycle. These are used obtain the average gas moisture contents. The

uncorrected wood moisture content is shown in column AC. This is the MC in column N before adjustment of the wet-bulb to make the beginning and ending MCs match the oven-dry test. The kiln air and analyzer air moisture contents (based on volume) are shown in columns AD and AE.

At the end of the FlowCalc spreadsheet are summaries by run of the flow data for the total hydrocarbon run intervals. Further down are summaries by impinger interval. These are the tables that appear in the body of the report. The other pages in the files "Kiln.XLS" are graphs of the data in the FlowCalc page.

Moisture content and board weight data are in the files named "Board, Run 1.XLS."

VI. Sampling Results

The hydrocarbon emissions are summarized graphically here. All emission data is presented in detail in electronic form in Appendix 2. A summary for each sampling interval is in Table 2.

Figure 5 shows total hydrocarbon concentration (left scale) and dry gas vent rate (right scale) versus time. The vent rate is low for the first few hours as the kiln comes up to temperature and the wet-bulb depression is small. The venting then increases to a maximum at six hours and decreases for the remainder of the schedule. The fluctuations in the venting and concentration at approximately 12-hour intervals are due to the changes in the schedule.

The total hydrocarbon concentration is very dependent on the venting early in the schedule with a high vent rate resulting in a low hydrocarbon concentration and vice versa. When the venting increases, the total hydrocarbon concentration decreases. Note that total hydrocarbon concentration is not indicative of the amount of hydrocarbon emissions unless one also considers the vent rate. These two factors combined determine the emissions.

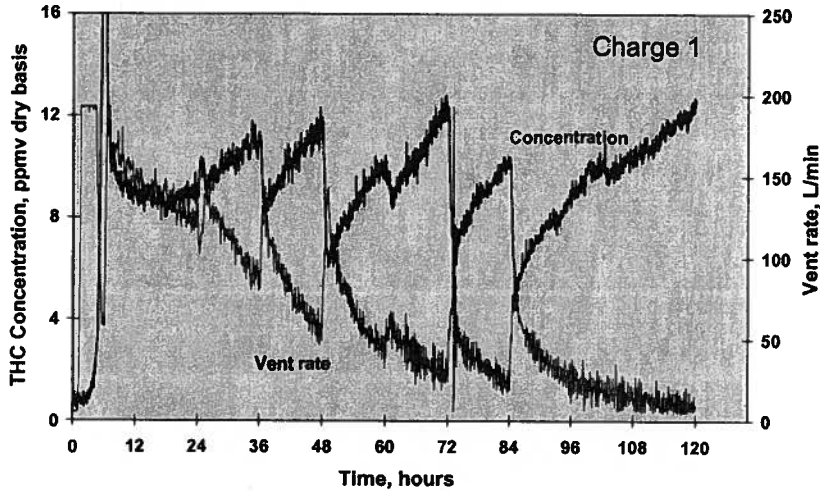


FIGURE 5. Hydrocarbon concentration and vent rate versus time.

Figure 6 shows the cumulative hydrocarbon emissions and the rate of emissions versus time. The cumulative emissions is the emissions up to any point in time in the schedule. The rate of emissions is how much is coming out per unit time. The maximum emission rates occur early in the schedule. The rate of emissions is very low at the end of the schedule.

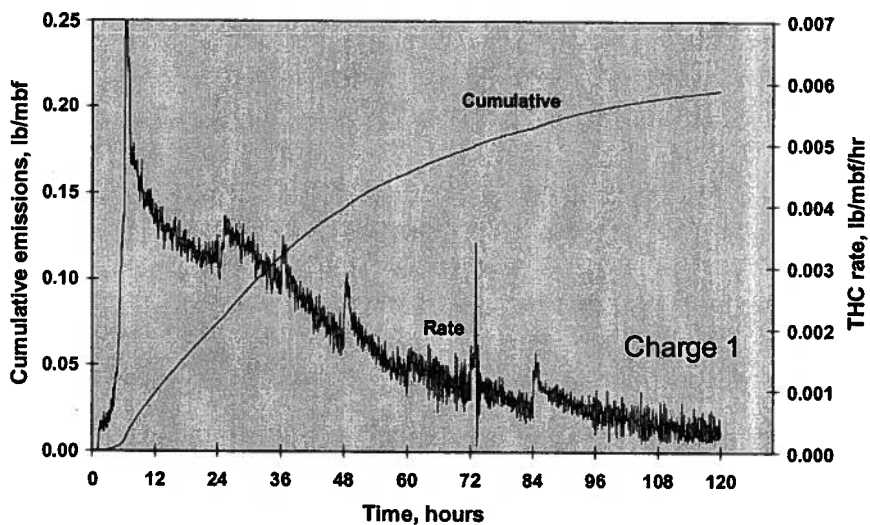


FIGURE 6. Cumulative and rate of emissions versus time (as carbon).

Figure 7 shows the wood moisture content versus time. The estimated moisture content is obtained from the humidity, vent rate, initial sample weight, final sample weight, and oven-dry sample weight. The initial moisture content was 101.5% on a dry basis by ASTM D4442. The final moisture content was 3.5%.

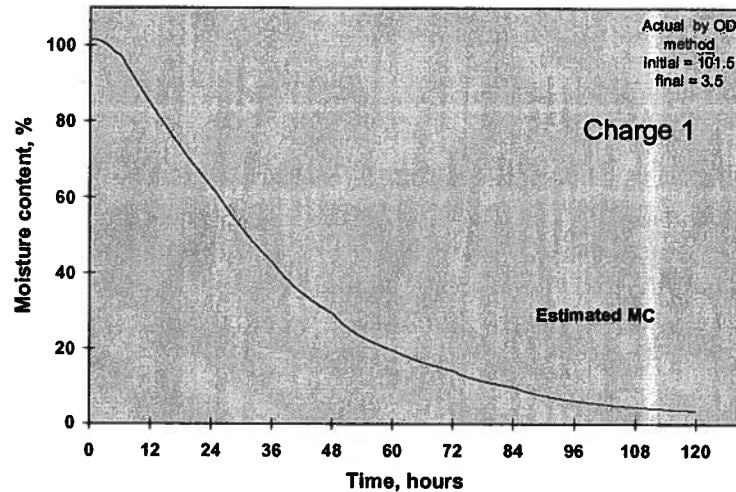


FIGURE 7. Moisture content versus time.

Figure 8 shows the cumulative hydrocarbon emissions versus moisture content. The hydrocarbon emissions for drying to any moisture content can be read from this graph. In agreement with past studies, there is a fairly linear relationship between the emissions and the decrease in moisture content, especially at lower moisture contents

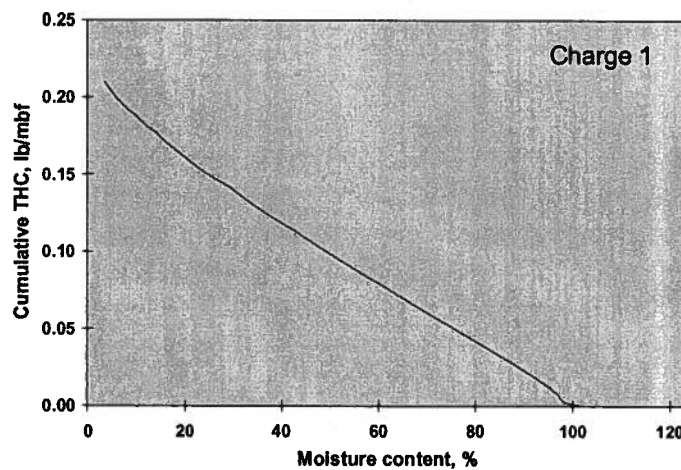


FIGURE 8. Cumulative emissions (as carbon) versus moisture content.

Table 2 shows the VOC results by run for the charges. A run is an interval between analyzer calibrations, about five to ten hours of data. The interval time periods shown in the table include the times between sampling and mass calculations are adjusted to account for these. Sampling occurred for approximately 98% of the drying time. Samples of field sampling sheets, including dilution system and heated component data are given in Appendix 3 with full PDF format versions in Appendix 2.

TABLE 2. Summary of sample runs for analysis of total hydrocarbon.

Sample Run	Time hrs	Dry Flow Rate @68 l/min	Wet Flow Rate @68 l/min	THC mass as C g	THC wet conc ppmv	THC dry conc ppmv	THC mass as C lbs/mbf	THC rate as C lb/hr/mbf	Average Wood MC %	Average Air MC %	Average Anal. MC %
1	6.95	143.0	158.7	0.41	4.4	5.3	0.012	0.0017	99.5	9.9	6.7
2	9.05	164.7	200.7	1.23	7.5	9.2	0.036	0.0040	85.7	18.0	12.1
3	5.65	143.7	175.0	0.63	7.0	8.7	0.019	0.0033	71.5	17.9	12.2
4	9.05	131.4	162.1	1.03	7.7	9.6	0.030	0.0033	58.7	19.0	13.1
5	10.05	109.3	134.7	0.98	8.0	10.0	0.029	0.0029	43.3	18.9	12.8
6	6.70	75.7	92.1	0.49	8.7	10.7	0.014	0.0021	32.8	17.8	12.3
7	6.85	96.8	114.8	0.46	6.7	8.1	0.014	0.0020	26.1	15.6	10.6
8	10.60	55.8	65.8	0.50	8.0	9.5	0.015	0.0014	19.8	15.1	10.4
9	7.20	37.8	44.5	0.27	9.5	11.2	0.008	0.0011	15.4	15.0	10.5
10	6.73	53.5	61.3	0.25	7.0	8.1	0.007	0.0011	12.4	12.7	9.0
11	10.45	46.4	52.2	0.32	7.0	8.1	0.010	0.0009	9.6	11.1	7.9
12	2.75	41.8	46.4	0.08	6.7	7.5	0.002	0.0008	7.3	10.1	10.1
Sum	92.03			6.7			0.196				
Average		91.6	109.0		7.4	8.8		0.0021			

VII. Quality Assurance

Leak checks

Leak checks were performed on the VOC system before and after drying by pulling a 17inHG vacuum and sealing the system for 2 minutes with no change in pressure.

Calibration

Data for the calibration gases are given in Appendix 4. The mid gas was not named because the analyzer was within tolerance without naming. The calibration sheet for the flow meter is also included in Appendix 4 as is the thermocouple calibration check.

Anomalies

There were no anomalies during the work that would significantly affect the data.

Appendix 1. Detailed Sampling Procedures

INSTRUCTIONS FOR CHECKS OF EMISSIONS KILN

Purpose: Ensure kiln is operating correctly

Clock time: Record from computer

Run time: Record from computer. Check the box if the computer screen being refreshed and time is advancing.

Box temperature: Read from metal electrical box under desk, left controller. The top and bottom numbers should be similar on the box should be similar, about 126 C..

Valve temperature: Read from metal electrical box under desk, right controller. The top and bottom numbers should be similar on the box should be similar, about 154 C..

Dry-bulb temperature: Read from computer screen. Compare to graph to be sure it's correct. If it's not within a degree or two of the chart, check again in a few minutes. During startup (the first 3 or so hours), it may not be able to track. If it's too high, the heat valve should be closed, too low and the heat valve should be open. If it does not appear to be working correctly, call Mike or Mark.

Wet-bulb temperature: Read from computer screen. Compare to graph to be sure it's correct.

If it is too low, it means that the kiln atmosphere is too dry. Check the flow meters. If Flow1 is about 10 L/min (its lower limit), make sure that Flow2 and Flow3 are turned off

If it's too high, then either the kiln atmosphere is too humid or the sock is not being wetted. If Flow 1 is near 200 L/min (its upper limit) add venting by opening Flow2 and/or Flow 3. The maximum for Flow2 is 50 L/min, if it reads over this value for several readings, reduce it to about 45 L/min. Don't change Flow3 often, rather set it and leave it for several hours if possible. Keep the Flow 3 reading constant by small adjustments. As Flow1 decreases or Flow2 turned down, there is more pressure behind Flow3 and the flow increased. Check for water in the wet-bulb reservoir (push the float down and make sure it's getting water).

Check both Wet-bulb1 and Wet-bulb2 and make sure they are reading about the same. If they differ by more than 2 C, call Mike or Mark.

If both wet-bulbs are reading the same as the dry-bulb, check the wet-bulb water.

If these procedures do not correct the wet-bulb temperature within 30 minutes, call Mike or Mark.

Line temperature: Read from gray box on wall above analyzer. It should read about 275°F.

Chiller temperature: Read the chiller temperature. It should be about -1°C.

Flow 1: Read from computer. The value of Flow1 changes depending on the wet-bulb. If Flow 1 is 10 L/min and the wet-bulb is too low, there's probably nothing we can do. If it's 200 L/min and the wet-bulb is too high, Flow2 and/or Flow3 can be opened. Flow2 and Flow3 should be adjusted so that Flow1 stays below 175 to 200 L/min.

Flow 2: Read from computer. The value of Flow2 is set by you. It will vary a little - as flow 1 goes down, flow 2 will go up. Do not set it to < 40 L/min if you think Flow1 is going to decrease or it will go off scale and not be read by the computer

Flow 3: Read from meter. The value of Flow3 is set by you. It will vary a little - as flow 1 goes down, flow 2 will go up. Be sure to clearly record this value and when you change it

Dilution flow: Read dilution flow meter. It should read the same setting as the red flag. Do not adjust. If significantly different, investigate.

F/M Flow: Read from rotometer. This should be about 400 to 500 cc/min.

Line vacuum: Read from the vacuum gauge. This should be about 20"Hg.

INSTRUCTIONS - FIELD DATA SHEET FOR TOTAL HYDROCARBON ANALYZER PRE-SAMPLE PROCEDURE

BACKGROUND INFORMATION

Get the dry- and wet-bulb temperatures from the kiln schedule or off the computer. Use the highest expected values for the run.

Read absolute humidity off the psychrometric chart or table.

Calculate or read from tables -

$$\text{Percent moisture} = 100 / [1 + 1 / 1.61 * \text{AbHum}]$$

$$\text{Target Dilution Ratio (TDR)} = 15 / \text{Percent Moisture}$$

Event = the name of the drying cycle.

Run = the number of the 3-hour interval.

Operator, that's you.

Date and time are now, as you start the data collection process.

AMBIENT DATA

Call 9-754-0081 and get altimeter setting.

Read the laboratory temperature from the thermometer.

ANALYZER CALIBRATION

Set valves so that 1, 2 = off; 3=on; 4=vent. This allows gas to flow out of the vents from the calibration tanks and shuts off all other sources. Only calibration gas should go through the detector.

Open the zero gas tank valve

zero toggle switch up (on), others down (off)

set flow to 3.5 L/min using regulator on tank

wait for a stable reading (about 30 to 60 seconds)

use the zero dial (pot) on THA to get a zero reading

read the analyzer

read computer

note pot setting

close valve on zero gas tank

Open span gas tank valve

span toggle switch up (on), others down (off)

set flow to 3.5 L/min using regulator on tank

set analyzer to range 3

wait for a stable reading (about 30 to 60 seconds)

use the span dial (pot) on THA to get a reading of 905 ppm

read the analyzer, record, for example, 9.05 or 900

read computer (should read about 905)

note pot setting

Open mid gas tank valve

mid toggle switch up (on), others down (off)

set flow to 3.5 L/min using regulator on tank

wait for a stable reading (about 30 to 60 seconds)

read analyzer (do not adjust pot settings), record, for example, 4.12 or 412

read computer (should about 412)

check for within tolerance

turn off mid gas

all toggle switches off

SET DILUTION FLOW BEFORE RUN

Set valves so that 1, 2, 3 = off; 4=meter. This allows gas to flow only from the meter to the detector.

Use the Gilibrator to take 4 readings of the total flow rate (TFR). This is the total flow drawn by the analyzer and should be about 2.6 L/min

Make sure the average does not include any "bad" readings

Record the average, L/min = cc/min / 1000

Write the Event, Run, and "Pre-TFR" on the Gilibrator printout.

Calculate the next two values -

Target dilution flow rate (TDFR) is the $TFR \times (1 - DR)$

Target sample flow rate (TSFR) is the $TFR \times DR$

Check that the sum of these is the Total Flow Rate

Set dilution flow

Set red pointer to desired dilution flow (on meter with valve 1)

Slowly open lower valve on dilution flow meter (1=on; 2, 3=off; 4=meter)

Use upper valve on dilution flow meter to adjust flow

Do not adjust this meter after this point

Read the meter that you just set and record the value

Use the Gilibrator to take 4 readings of the sample flow rate (SFR). This is the flow through the analyzer after dilution is set. It will vary, depending on the dilution setting.

Make sure the average does not include any "bad" readings

Record the average, L/min = cc/min / 1000

Write "Pre-SFR" on the Gilibrator printout.

CHECK DILUTION FLOW BEFORE RUN

Set valves so that 1, 3 = on; 2=off; 4=vent. This allows gas to flow out of the vent from the calibration tank and shuts off all other sources. Calibration gas and dilution air will go through the detector.

Open span gas tank valve

span toggle switch up (on), others down (off)

set flow to 3.5 L/min using regulator on tank

set analyzer to range 3

wait for a stable reading (about 30 to 60 seconds) record

turn off all calibration gas tank valves

all toggle switches off

Calculate the dilution ratio based on gas flow by dividing the Sample Flow Rate by the Total Flow Rate.

Calculate the dilution ratio based on span gas by dividing the Diluted span by the undiluted span.

If the Dilution ratios do not agree within 5% - DO NOT PROCEED****. Use $100 * (DR_{Span} - DR_{Flow}) / DR_{Flow}$ to calculate the % difference.

**** check calculations, check that values for ppm and flows make sense, remeasure everything. If it still does not agree, call Mike or Mark

START RUN

Set valve so that 1, 2, 5 = on; 3, 4=off; all calibration tank valves off

Record the start time. Use the computer clock for all times or set your watch to the computer time.

Make sure analyzer is on appropriate range, usually range 3, to keep THC reading on computer between 60 and 750.

Monitor system, as needed. Record system condition at least hourly.

End time should be no more than 3 hours from start time.

POST-SAMPLE PROCEDURE

AT END OF RUN

Record your name as the operator.

Event = the drying cycle. Run = the 3-hour interval.

Operator, that's you. Date and time are now, as you start the data collection process.

AMBIENT DATA

Call 9-754-0081 and get temperature and altimeter

Local pressure = (Altimeter - 0.23) x 3.3867

Read the laboratory temperature from the thermometer.

Fill out appropriate information on Pre-sample side of data sheet for next run. This will save time in between runs.

END TIME

Record computer time.

DO NOT adjust dilution gas yet.

CHECK DILUTION FLOW AFTER RUN

Set valves so that 1, 3 = on; 2=off; 4=vent. This allows gas to flow out of the vent from the calibration tank and shuts off all other sources. Calibration gas and dilution air will go through the detector.

Open span gas tank valve

span toggle switch up (on), others down (off)

set flow to 3.5 L/min using regulator on tank

wait for a stable reading (about 30 -60 seconds)

record

all toggle switches off

Sample flow rate. Set valves so that 1=on; 2, 3 = off; 4=meter. This allows gas to flow only from the meter and the dilution to the detector.

Use the Gilibrator to take 5 readings of the sample flow rate (SFR). This is the flow through the analyzer with dilution on.

Make sure the average does not include any "bad" readings

Record the average, L/min = cc/min / 1000

Write "Post-SFR" on the Gilibrator printout.

Read dilution flow meter
To calculate the L/min, divide scfh by 2.12
Turn off dilution flow meter using valve 1

Total flow rate. Set valves so that 1, 2, 3 = off; 4=meter. This allows gas to flow only from the meter to the detector.

Use the Gilibrator to take 5 readings of the total flow rate (TFR). This is the total flow drawn by the analyzer and should be about 2.6 L/min
Make sure the average does not include any "bad" readings
Record the average, L/min = cc/min / 1000
Write "Post-TFR" on the Gilibrator printout.

CHECK CALIBRATION OF ANALYZER

Set valves so that 1, 2 = off; 3=on; 4=vent. This allows gas to flow out of the vents from the calibration tanks and shuts off all other sources. Only calibration gas should go through the detector.

Span gas tank valve should be open
span toggle switch up (on), others down (off)
set flow to 3.5 L/min using regulator on tank
set analyzer to range 4
wait for a stable reading (about 30 -60 seconds)
read analyzer (do not adjust pot settings), record, for example, 1.50 as 1500
read computer (should read about 152 due to range 4 setting)
note pot setting
check for within tolerance - between 1483 and 1573

Open mid gas tank valve
mid toggle switch up (on), others down (off)
set flow to 3.5 L/min using regulator on tank
set analyzer to range 3
wait for a stable reading (about 30 -60 seconds)
read analyzer (do not adjust pot settings), record, for example, 8.50 as 850
read computer (should read same as analyzer)
check for within tolerance

Open the zero gas tank valve
zero toggle switch up (on), others down (off)
set flow to 3.5 L/min using regulator on tank
wait for a stable reading (about 30 -60 seconds)
read analyzer (do not adjust pot settings)
read computer

note pot setting

Calculate the dilution ratio based on gas flow by dividing the Sample Flow Rate by the Total Flow Rate.

Calculate the dilution ratio based on gas flow by dividing the Sample Flow Rate by the Total Flow Rate.


Calculate % difference as $100 * \{ \text{Absolute Value } (DR_{\text{Span}} - DR_{\text{Flow}}) \} / DR_{\text{Flow}}$

Record the time now as the end time for check.

Tear off the four sets of Gilibrator readings (Pre-TFR, Pre-SFR, Post-SFR, Post-TFR) and staple to paper with other records.

Start Pre-Sample procedure for next run.

Appendix 2. Data in Electronic Form

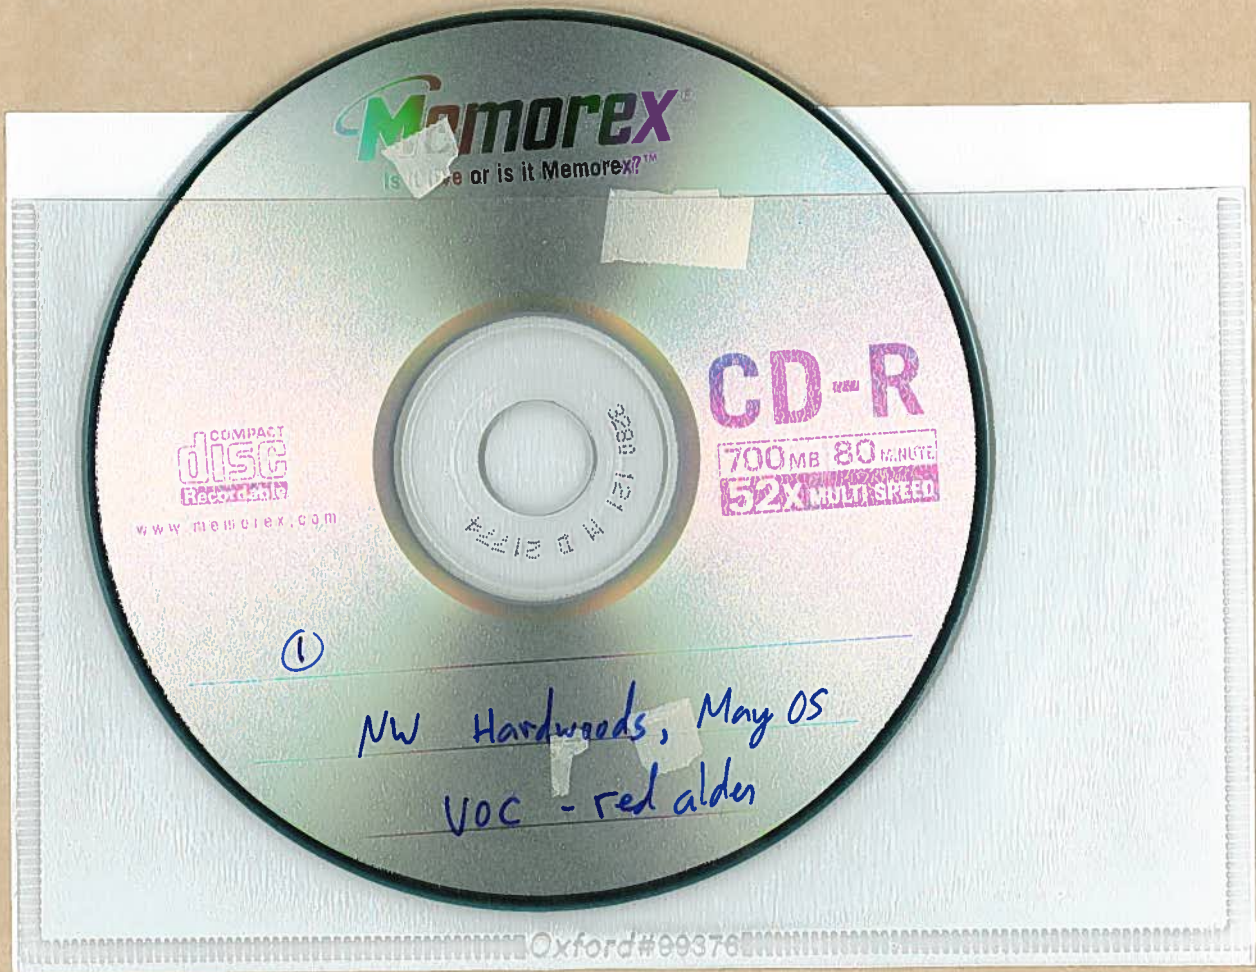

Appendix 3. Samples of Field Data Sheets

FIELD DATA SHEET FOR TOTAL HYDROCARBON ANALYZER - PRE

BACKGROUND INFORMATION

Event (kiln charge): NW HW - 1

Time now: 12:44

Run (sample): 4

Dry-bulb temperature: 150

Operator: M. W. S.

Wet-bulb temperature: 148

Date: 5-8-05

Target Dilution Ratio (TDR): 0.64

AMBIENT DATA

Laboratory temperature: 24 °C

ANALYZER CALIBRATION

[1, 2 = off; 3=on; 4=vent]

	Analyzer, ppm	Computer	Within range	Pot settings
zero	0 (0)	0	does not apply	275
span	905 (905)	906	does not apply	245
mid	411 (412)	411	379 to 437	none

SET DILUTION FLOW BEFORE RUN

Total flow rate (TFR): 2.601 L/min [1, 2, 3 = off; 4=meter]

Target dilution flow rate (TDFR) 0 L/min [TFR x (1 - DR)]

sample flow rate (TSFR) _____ L/min [TFR x DR]

Set and read dilution meter: 1.61 scfh [scfh = L/min * 2.12]

Sample flow rate (SFR): 1.754 L/min [1 = on; 2, 3 = off; 4=meter]

CHECK DILUTION FLOW BEFORE RUN

[1, 3=on; 2=off; 4=vent]

	Analyzer	DR _{Span} [Span _{Diluted} /Span]	DR _{Flow} [SFR / TFR]	Difference, % 100*(DR _{Span} - DR _{Flow})/DR _{Flow}
Span _{Diluted}	611	0.675	0.674	0.2

START TIME: 12:53 [1, 2, 5 = on; 3, 4 = off; tank valves off]

ANALYZER RANGE: 2 [60 < computer reading < 750]

FIELD DATA SHEET FOR TOTAL HYDROCARBON ANALYZER - POST

Operator: M. Lota

Event (kiln charge): NW HW-1

Time now: 9:48

Run (sample): 4

AMBIENT DATA

Laboratory temperature: 26 °C

END TIME: 9:48

CHECK DILUTION FLOW AFTER RUN

[1, 3=on; 2=off; 4=vent]

	Analyzer	Computer
Span _{Diluted}	622	622

Sample flow rate (SFR) : 1.769 L/min [1= on, 2, 3 = off, 4=meter]

Read dilution meter: 1.61 scfh L/min [L/min = scfh*0.472]

Total flow rate (TFR): 2.605 L/min [1, 2, 3 = off; 4=meter]
 (attach print out with all four sets of data)

Dilution ratio (DR_{Flow}): 0.679 [SFR / TFR]

CHECK OF ANALYZER CALIBRATION

[1, 2=off; 3=on, 4=vent]

	Analyzer	Computer	Within range	Pot settings
span	910	910	875 to 935	245
mid	413	414	379 to 437	none
zero	0	0	-45 to +45	475

Dilution ratio (DR_{Span}): 0.684 [Span_{Diluted} / Span]

Dilution ratio difference: 0.7 % [100*(Abs(DR_{Span} - DR_{Flow}))/DR_{Flow}]

End time for check: 9:53

Comments:

Charge: 1	Date	Time
NW Hardwoods		
Page: 2	Start: 5-12-05	End: 3:10

Clock time	Run time	Run	Temperatures					Flows					Line Vac. inHg				
			Box °C	Valve °C	Dry-bulb °C	Wet-bulb °C	Line °F	Chiller °C	Flow 1 L/min	Flow 2 L/min	Flow 3 SCFH	Dilution SCFM		F/M mL/min			
5:10																	
7:57	64:47	8	126	145	76.7	59.4	273		43	0				1.6			
8:08	64:58	9	126	145	76.8	59.8	273		50	0				1.6			
11:36	68:27	9	125	145	77.7	59.8	272		38	0				1.6			
15:17	72:07	10	125	145	77.9	59.9	274		37	0				1.6			
4:15	Reset computer to time = 0					57											
4:16	0:01	10	125	145	79.3	57.6	273		195	0				1.6			
5:06	0:52	10	125	145	79.8	56.4	273		61	0				1.6			
21:56	5:41	10	124	145	80.9	57.7	273		33	0				1.6			
22:04	5:49	11	126	145	77.9	57.2	273		36	0				0			
8:26	16:09	11	125	145	86.1	54.4	273		43	0				0			
14:02	22:28	12	126	145	85.1	54.4	273		31	0				0			
5:21	25:06	13	125	145	85.4	54.3	273		24	0				0			
9:45	29:27	14	125	145	86.1	54.7	273		18	0				0			
7:36	29:22	14	124	145	86.5	54.5	274		9	0				0			
12:00	43:44	15	125	145	86.1	54.8	274		7	0				0			
3:08	46:54	15	125	145	87.8	54.7			11	0				0			

25

2626	2616	02
2617	2617	03
2615	2616	04

GILIBRATOR 2 WET V4.4 DATE.....
PUMP S/N.....ID.....

FLOW	AVERAGE	# SAMPLES
245.5	245.5	01
2615	1430	02
2624	1828	03

GILIBRATOR 2 WET V4.4 DATE.....
PUMP S/N.....ID.....

FLOW	AVERAGE	# SAMPLES
2608	2608	01
2608	2608	02
2610	2609	03
2610	2609	04
2626	2613	05
2608	2612	06

(12)

GILIBRATOR 2 WET V4.4 DATE.....
PUMP S/N.....ID.....

FLOW	AVERAGE	# SAMPLES
2581	2581	01
2583	2582	02
2583	2583	03
2588	2584	04

GILIBRATOR 2 WET V4.4 DATE.....
PUMP S/N.....ID.....

FLOW	AVERAGE	# SAMPLES
444.2	444.2	01
-444.2	0.000	00
2592	2592	01
2592	2592	02
2597	2594	03
2588	2592	04

(13)

GILIBRATOR 2 WET V4.4 DATE.....
PUMP S/N.....ID.....

FLOW	AVERAGE	# SAMPLES
2613	2613	01
2624	2618	02
2631	2623	03
2631	2625	04
2613	2622	05

GILIBRATOR 2 WET V4.4 DATE.....
PUMP S/N.....ID.....

FLOW	AVERAGE	# SAMPLES
452.0	452.0	01
-452.0	0.000	00
2622	2622	01
-2622	0.000	00
2610	2610	01
2617	2614	02
2613	2614	03
2617	2614	04
2608	2613	05

(14)

GILIBRATOR 2 WET V4.4 DATE.....
PUMP S/N.....ID.....

FLOW	AVERAGE	# SAMPLES
2622	2622	01

Appendix 4. Calibration Data

Certificate of Analysis: EPA Protocol Gas Mixture

Airgas Specialty Gases
12722 South Wentworth Avenue
Chicago, IL 60628
www.airgas.com

Cylinder Number: CC166118 Reference Number: 54-124033817-1
Cylinder Pressure: Expiration Date: 4/12/2008
Certification Date: 4/12/2005 Laboratory: ASG - Chicago - IL

Certified Concentrations

Component	Concentration	Accuracy	Analytical Principle	Procedure
PROPANE	905.3 PPM	+/- 1%	FID	G1
Air	Balance			

Certification performed in accordance with "EPA Traceability Protocol (Sept. 1997)" using the assay procedures listed. Analytical Methodology does not require correction for analytical interferences.

Notes:

Do not use cylinder below 150 psig.

Approval Signature _____

Reference Standard Information

Type	Balance Gas	Component	Cyl. Number	Concentration
NTRM 1050606		PROPANE	SG9133675BAL	965.6 PPM

Analytical Results

1st Component **PROPANE**

1st Analysis Date: 04/12/2005

R 964.139	S 905.388	Z 0	Conc 906.8 PPM
S 904.269	Z 0	R 965.706	Conc 904.2 PPM
Z 0	R 964.987	S 904.365	Conc 904.9 PPM
			905.3 PPM

BOC GASES
VANCOUVER, WASHINGTON

Order Number : GS-1575

Approx. Pressure : 2200 psig
CGA Outlet : CGA-346
Fill Date : 07-JAN-2003
Expiration Date : 08-JAN-2008
Lot Number : 26548

Zero 0.1 Air

CYLINDER CONTENT ANALYSIS

Component	Concentration
Oxygen	21.8 %
Nitrogen	Balance
Moisture	<3.0 ppm
Total Hydrocarbon	<0.1 ppm

BOC GASES
PORT ALLEN, LOUISIANA

Cylinder # : CC5263
CU # : 0102500577
Pressure : 2000 psig
CGA Outlet : 152/590 BR 3360
Fill : 13-JAN-2004
Expired : 12-JAN-2007
Material : G3H8 400M (AIR) CERT 152

CYLINDER CONTENT ANALYSIS

Component	Concentration
propane	412 ppm
air	BALANCE



Flow
Calibration Record Sheet
(200 SLM)

ERA #: 128889W

Customer: OREGON STATE UNIVERSITY

MKS Transfer Standard Type: 1589A-200L-SV

Serial Number: WS 195

MKS Primary Standard Type: A-200-1

Serial Number: 14852-1-1

Standard Flow Rate (SLM)	UUT Flow Rate (SLM)	UUT Error (SLM)	Percent of full scale Error
0.00	0.000	0.000	0.000%
50.000	50.000	0.000	0.000%
100.000	99.850	-0.150	-0.050%
150.000	150.040	0.040	0.020%
200.000	200.000	0.000	0.000%

UUT Model: 1589A-200L-SV

UUT Process Gas: N2

Process Gas used: N2

Date of Calibration: 05/10/00

UUT Serial #: 000317785

UUT Range: 200 SLM

Calibrated by: DP

Verified by:


Notes:

1. All units must be operated on regulated heat (Power on) for a minimum of one hour before any adjustment is made.
2. Flowmeters and/or Controllers are Calibrated at atmospheric pressure.
3. This Calibration is referenced to 0 Degree Celsius and 760 Torr.

3050 Scott Blvd., Bldg. #4, Santa Clara, CA 95054

This MKS Certificate or report shall not be reproduced except in full, without the written approval of the Laboratory (MKS).

TC Calibration 07/02/12	
Omega Calibrator C	PC Readout C
30.0	30.0
50.0	50.1
70.0	70.1
90.0	90.1
110.0	110.0

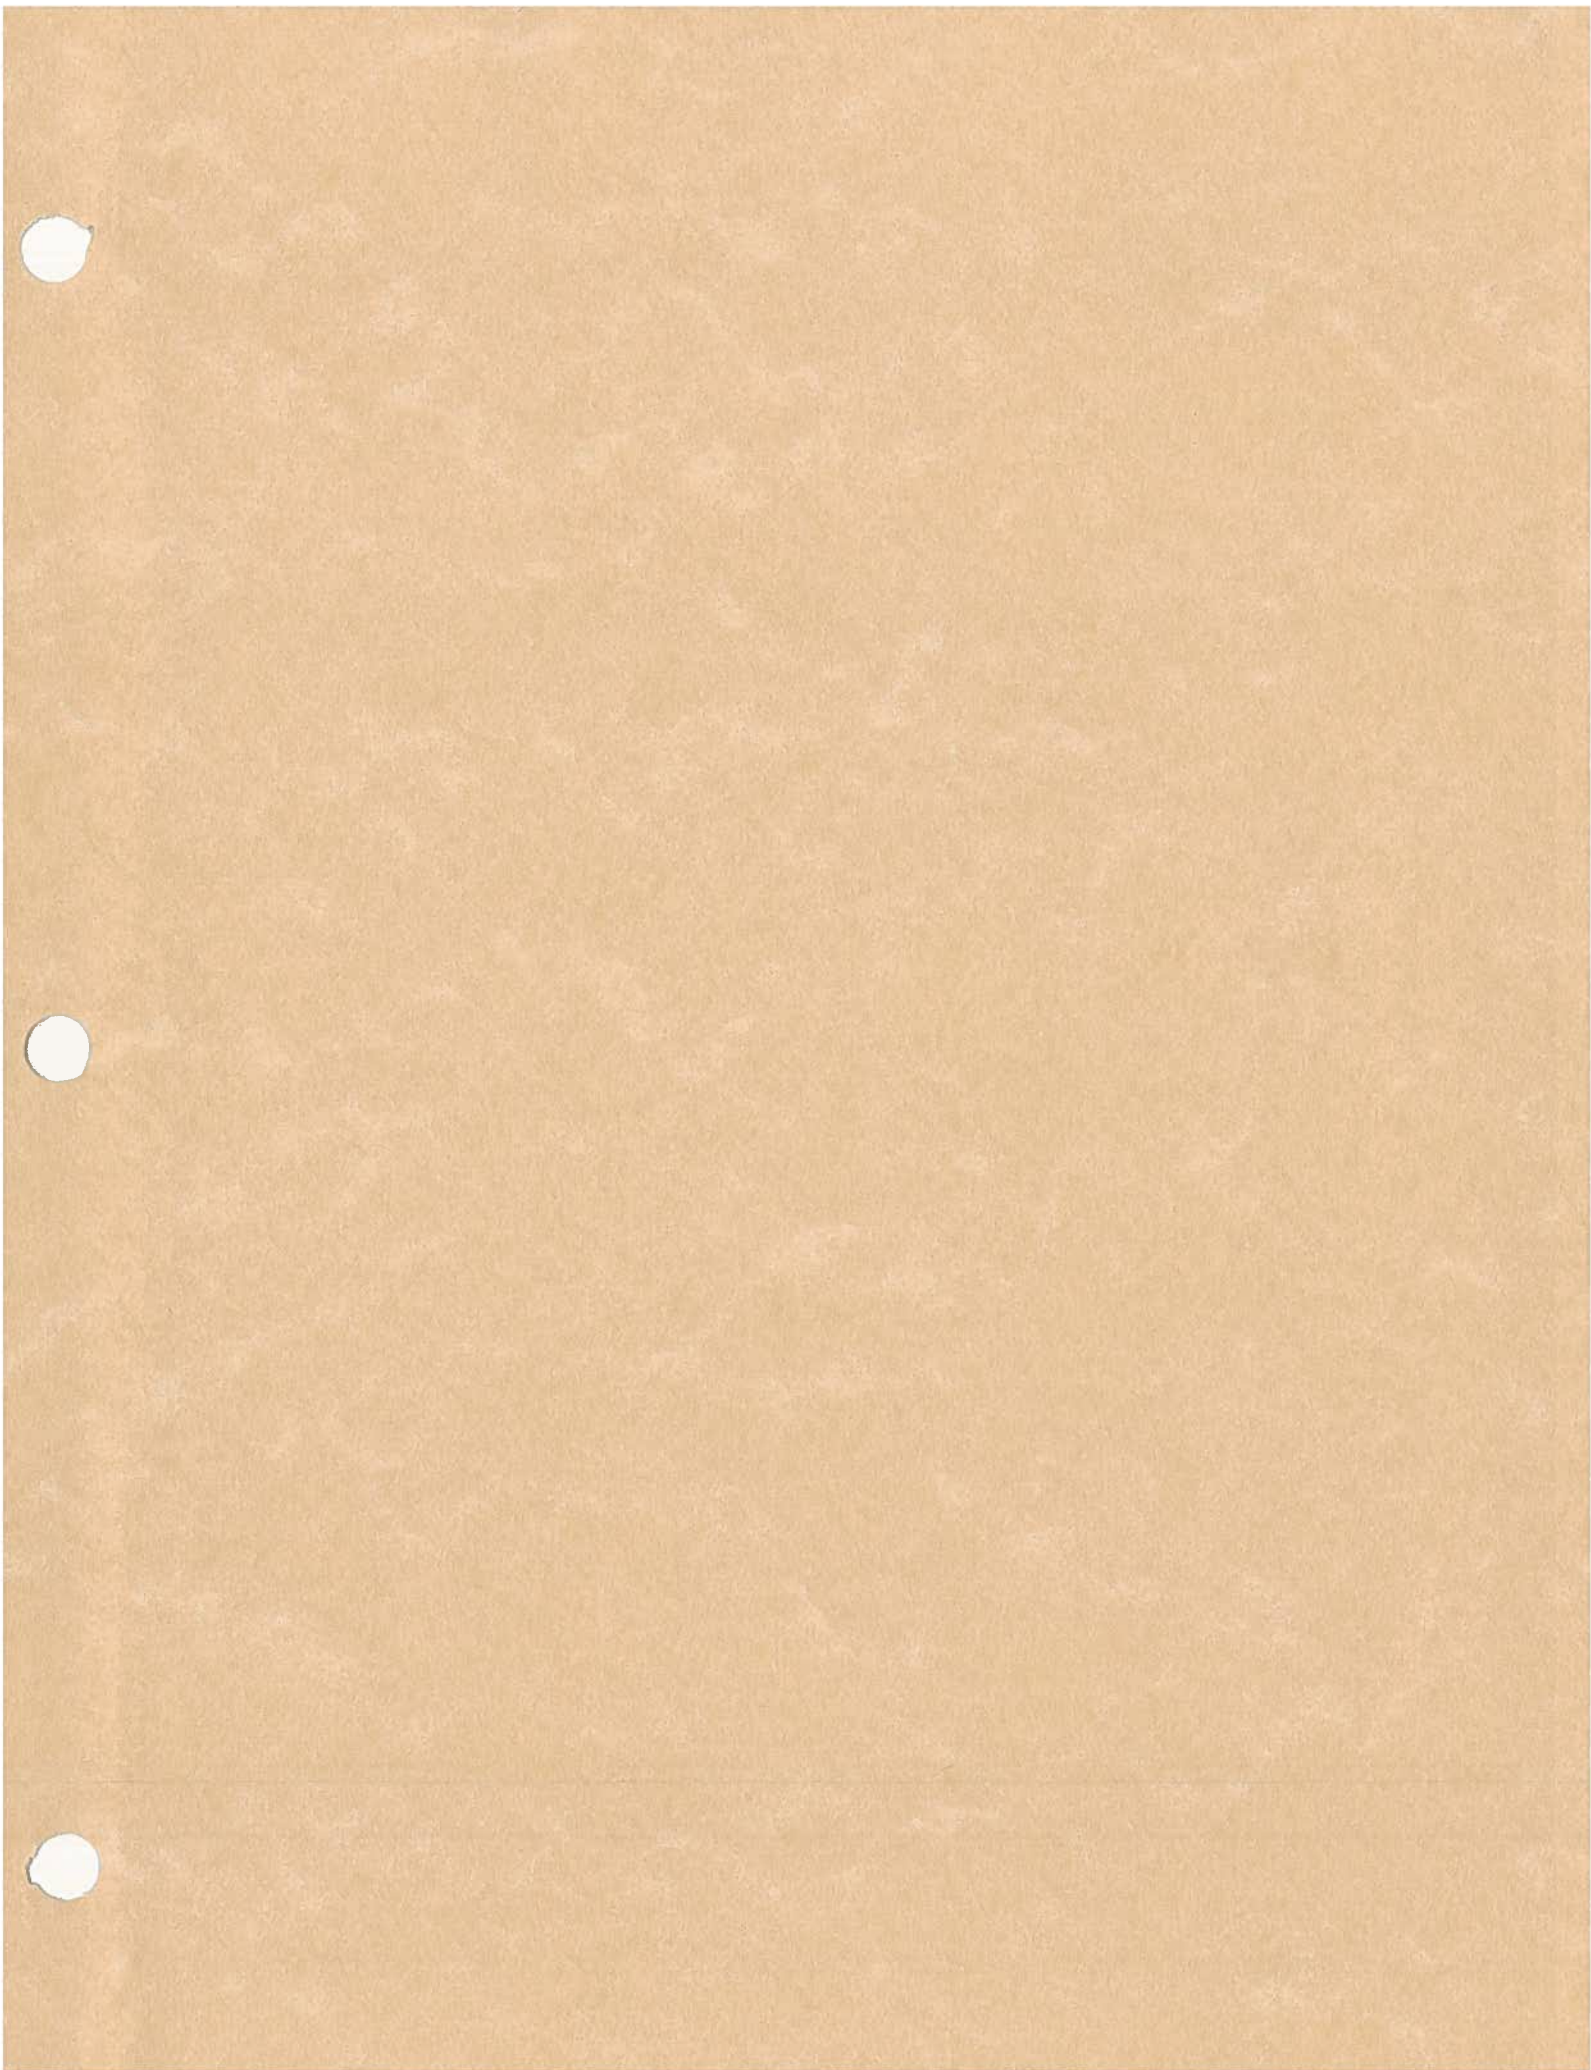

BOC GASES
VANCOUVER, WASHINGTON

Cylinder # : 12005
P.O. # :
Approx. Pressure: 2200 psig
CGA Outlet : CGA346
Fill Date : 25-JUL-2000
Expired Date : 24-JUL-2005
Test # : VAN-01-23061
Material: Air, Zero 0.1

CYLINDER CONTENT ANALYSIS

Component	Concentration
Oxygen	20.6 %
Nitrogen	Balance
Moisture	<3.0 ppm
Total Hydrocarbons	<0.10 ppm

BOC GASES
RIVERTON, NEW JERSEY

Cylinder # : 389284
CU # : 1080800
Pressure : 2000 psig
CGA Outlet : 201RFO BR 3360
Fill : 19-JUL-2003
Expired : 19-JUL-2003
Material : 2 COMP MIX BAL AIR

CYLINDER CONTENT ANALYSIS

Component	Concentration
Propane	681 ppm
Air	BALANCE

BOC GASES
VANCOUVER, WASHINGTON

Cylinder Number CC85608

Fill Date : 5/ 1/00
Cyl. Pressure : 2000
Cyl. Size : 152
CGA Outlet : 590
Amount : 1527 PPM

Test # 99060814

Contents
PROPANE 1500 PPM
AIR BALANCE